

R-2000iC/220U



Max. load capacity
at wrist: 210 kg



Max. reach:
2518 mm

FANUC

Robot			Max.load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range [°]						Maximum speed [°/s] ***						Moments (N-m)/Inertia (kg-m ²)			Average Power consumption (kW)	Protection	
Series	Version	Type						J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6	J4 Moment/ Inertia	J5 Moment/ Inertia	J6 Moment/ Inertia		Body standard/optional	Wrist & J3 arm standard/optional
R-2000	iC	220U	220	2518	6	± 0.05*	1020**	370	136	312	720	250	720	120	85	110	140	140	220	1360/ 147	1360/ 147	735/ 82	3	IP54	IP67

● standard

○ on request

- not available


* Based on ISO9283

** Without controller

*** During short distance motions, the axis speed may not reach the maximum value stated.

R-2000iC/220U

Upside down mount

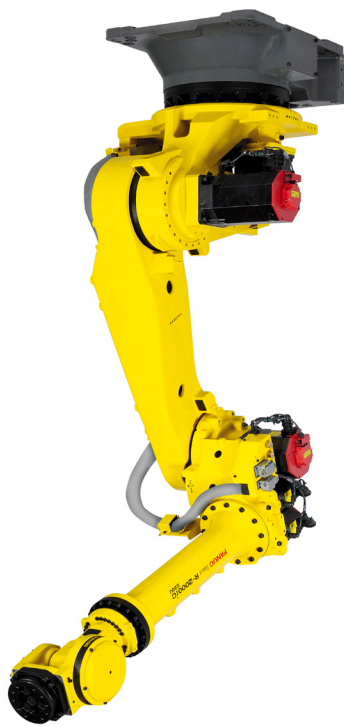

R-2000iC/220U

